

# M Series - Subminiature

▶ MOPD: 100 PSI (6.9 Bar)

C<sub>v</sub> Range: 0.018 to 0.070 (K<sub>v</sub> Range: 0.017 to 0.032)

As Low As 0.5 Watts


The M Series implements efficient power conservation in a solenoid valve that is specifically designed for sub-miniature two- and three-way pneumatic and select liquid applications. Field proven to exceed performance requirements in battery-powered applications, the M Series can be designed for extreme low wattage conditions. With a compact size, consistent high-speed response time, and reliable operation over 200 million cycles, the M Series delivers extended performance and precision flow control in a small lightweight environment.

## **Typical Applications**


Ideal for inline PC interfacing and manifold assemblies:

- · Medical and Therapeutic Healthcare
- · Clinical Chemistry and Analysis Equipment
- · Drop-on-Demand Printing
- Environmental Instrumentation

## Dimensions

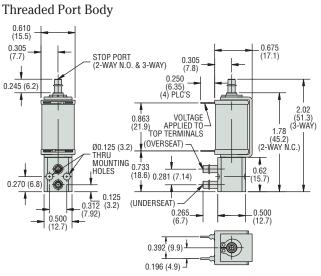


## Manifold Mount Body

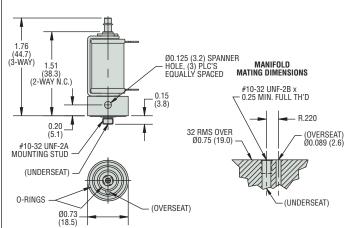

 $\epsilon$ 

## How To Order

Use the **Bold** characters from the choices listed on the following page to construct a product code.

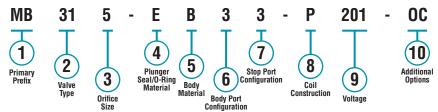

Note: After the Primary Prefix, any "-Code" may be blank when standard (blank) selections are specified.

### Example:

MB315-EB33-P-201

1 Watt 3-Way N.C. solenoid valve with a 0.052" (1.321mm) orifice, EPDM plunger seal/oring, brass body, 1/8" barb body and stop port, P.C. board mount (4-pin), operating at 5 VDC, and is cleaned for oxygen use.

## Part Prefix Table 1

Power Rating	Orifice		MOPD		C <sub>v</sub>	K <sub>v</sub>	1)Primary
	inches	mm	psi	bar	Во	dy	Prefix
0.5 Watt	0.031	0.787	25	1.7	0.018	0.015	MA
	0.052	1.321	10	0.7	0.037	0.032	MA
1 Watt	0.031	0.787	50	3.4	0.018	0.015	MB
	0.052	1.321	25	1.7	0.037	0.032	MB
2 Watts	0.031	0.787	100	6.9	0.018	0.015	MC
	0.052	1.321	50	3.4	0.037	0.032	MC

- (2) Valve Type
  - 20 = 2-Way normally closed
  - 22 = 2-Way normally open
  - 30 = 3-Way normally closed (free vent)
  - 31 = 3-Way normally closed (line connection)
  - 32 = 3-Way normally open
  - 33 = 3-Way multi-purpose
  - 34 = 3-Way directional control
- (3) Orifice Size
  - 2 = 0.031" (0.79mm)
  - 5 = 0.052" (1.32mm)
- 4 Plunger Seal / O-Ring Material
  - V = Viton®
  - N = Nitrile
  - $\mathbf{E} = \mathsf{EPDM}$
- (5) Body Material
  - $\mathbf{B} = \text{Brass}$
  - $\mathbf{A} = Aluminum$
- (6) Body Port Configuration<sup>1</sup>
  - **0** = Face mount

  - 1 = 1/16" (1.6mm) barb 2 = 5/64" (2.0mm) or 3/32" (2.4mm) barb 3 = 1/8" (3.2mm) barb

  - 4 = Manifold mount, #10-32 UNF-2A stud<sup>†</sup>
  - $\mathbf{5} = #10-32 \text{ UNF-2B female thread } (180^{\circ} \text{ apart only})$
  - $6 = 1/8"-27 \text{ NPT ports } (180^\circ \text{ apart only})$

## (7) Stop Port Configuration<sup>1</sup>

- 0 = No barb (Standard for 2-way NC & 3-way free vent)<sup>23</sup>
- 1 = 1/16" (1.6mm) barb (.031" orifice only)
- 2 = 5/64'' (2.0mm) or 3/32'' (2.4mm) barb
- 3 = 1/8" (3.2mm) barb

## (8) Coil Construction (Tape-Wrapped, 130°C Class B)

- $\mathbf{U} = P.C.$  board solderable (2-pin)
- $\mathbf{P} = P.C.$  board mount  $(4-pin)^4$
- $\mathbf{Q} = \text{Quick connect } 0.1\dot{1}0^{''}(2\dot{.}79\text{mm}) \text{ spade}$
- L = Lead-wires, #26 AWG, 18" (45.7cm) long
- **W**\_\_ = Lead-wires (Specify length in inches)
- (9) Voltage
  - **200** = 3 VDC
  - 201 = 5 VDC
  - **203** = 12 VDC
  - 204 = 24 VDC
  - **VDC** = DC (specify voltage)
  - VAC = AC Rectified 2-watt coil only (specify voltage, lead-wires only)

## (10) Additional Options


- **OC** = Cleaned for oxygen use
- **VAC** = Vacuum application 0 to 27" Hg (0 to 914 mBar)


#### Notes


- 1 Barbs are brass
- 2. For Stop Port Configuration, must select "0" for valve type 20 (2-way NC) and for type 30 (3-way NC Free Vent).
- 3. For Stop Port Configuration, must select "1" or "2" or "3" for valve types 22 (2-way NO), 31 (3-way NC Line Connect), 32 (3-way NO), 33 (3-way MP), and 34 (3-way DC). Selection "0" can not be used.
- 4. 2 pins near stop are active.


Gems specializes in the design and manufacturing of custom solenoid valves and fluidic systems. If you don't see what you're looking for, or have a question, contact us at 800-378-1600 or info@gemssensors.com.

#### Flow Schematic

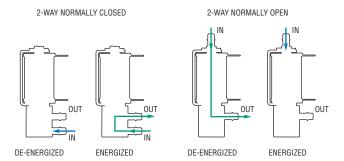

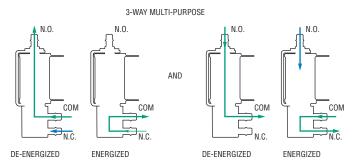





3-WAY DIRECTIONAL CONTROL DE-ENERGIZED **ENERGIZED** 

Flow Kev **Blocked Flow** Free Flow

<sup>†</sup> Teflon® o-ring not suitable for manifold mount.